

Prestige 623 Series

ADSL Ethernet/USB Gateway




The Prestige 623 series is a reliable, easy-to-install ADSL Ethernet/USB gateway that provides unrivaled flexibility. By offering both Ethernet and USB ports, users can access the Internet with a choice of interface options. The Prestige 623 series is ideal for small office / home office environments and allows users to share a single DSL line and single IP address.

Easy to set up and deploy, the Prestige 623 is interoperable with all industry standards. ZyXEL's Prestige 623 series brings together the best combination of ADSL technology to make the greatest use of your high-speed Internet connection.

Benefits

- Provides unrivaled flexibility to connect a PC by offering both USB and Ethernet interface options.
- Affordable, multi user access with a single DSL line
- Easy to use and manage with the Web-based Graphic User Interface (GUI)
- Installation is quick and simple
- Compatible with all major DSLAM manufacturers

Application Diagram

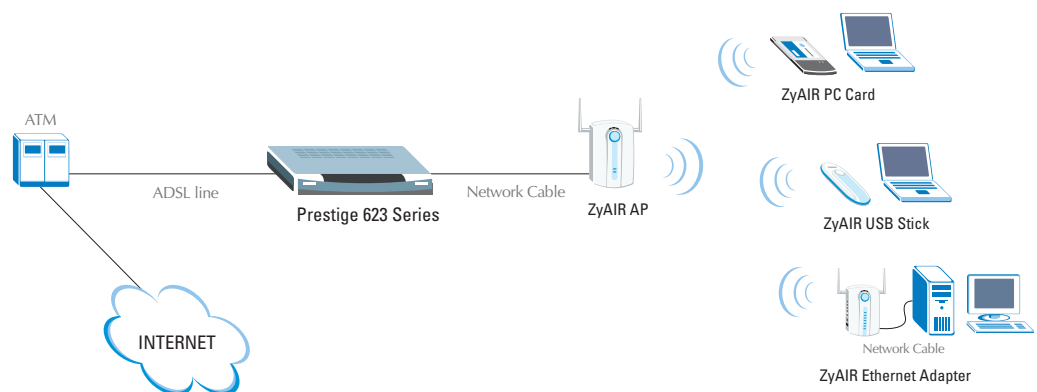

Features

ADSL Compliance

- Multi-Mode ADSL Standard
 - RADSL (DMT T1.413 Issue 2)
 - G.dmt (ITU G.992.1)
 - G.lite (ITU G.992.2)
- Auto-negotiating rate adaptation
- Support Dying Gasp

ATM Protocols

- ADSL physical layer support ATM Adaptation Layer Type 5 (AAL5)
- Multiple Protocol over AAL5 (RFC 1483)
- Support UBR, CBR, and GFR service classes
- Supports up to 64 Virtual Channel Connections (VCCs)
- VC and LLC based multiplexing
- ATM Forum UNI4.0 PVC
- OAM F4/F5
- Connection admission control (CAC)
- 8 VCs support

PPP Support

- PPP over AAL5 (RFC 2364)
- PPP over Ethernet (PPPoE, RFC 2516)

Bridging

- IEEE 802.1d transparent bridging
- Supports bridged PDU encapsulation (Spanning tree)

Internet Access Sharing

- PAP or CHAP for user authentication
- NAT/SUA support
- UPnP support

Routing Protocols

- RIP I/ IP II support
- DHCP server, DHCP client and DHCP relay
- Supports Internet Protocol Configuration Protocol (IPCP)

Management

- TFTP (Trivial File Transfer Protocol) and FTP
- SNMP support
- Auto-configuration
- Management access via SNMP, HTTP, and CLI

Security

- IP filtering and raw filtering
- PAP
- CHAP

Operating Systems Support

- The Ethernet port is operating system independent.
- USB port supporting Windows98/98SE, Windows ME, Windows 2000, XP and MAC 10.x

Specifications

Hardware Specification

- One RJ-11 port for ADSL connection
- One USB Port
- One RJ-45 port for 10M/100M auto-sensing
- Ethernet LAN port
- Power switch
- One PS2 console port
- Reset bottom

Physical Specification

- Dimensions: 181mm(L) x 128mm(D) x 37mm(H)
- Weight: 275g

Power Requirement

- AC input voltage: 100 to 120 VAC, 200 to 240 VAC
- Output: 12VAC

Operating Environment

- Temperature: 0 ~ 40°C
- Humidity: 20 ~ 90% (non-condensing)

Optional Parts

- Microfilter
- POTS Splitter

2-Year Warranty

Approval

- FCC part 15 class B, FCC part 68, CE Mark, EN60950, IEC 60950, CSA 950



Corporate Headquarters
 ZyXEL Communications Corp.
 Tel: +886-3-578-3942
 Fax: +886-3-578-2439
 Email: sales@zyxel.com.tw
 http://www.zyxel.com
 http://www.zyxel.com.tw

North America
 ZyXEL Communications Inc.
 Tel: +1-800-255-4101
 Email: sales@zyxel.com
 http://www.us.zyxel.com

Germany
 ZyXEL Deutschland GmbH.
 Tel: +49 2405 6909 0
 Fax: +49 2405 6909 99
 Email: sales@zyxel.de
 http://www.zyxel.de

Denmark
 ZyXEL Communications A/S
 Tel: +45 39 55 07 00
 Fax: +45 39 55 07 07
 Email: sales@zyxel.dk
 http://www.zyxel.dk

Norway
 ZyXEL Communications A/S
 Tel: +47 22 80 61 80
 Fax: +47 22 80 61 81
 Email: sales@zyxel.no
 http://www.zyxel.no

Sweden
 ZyXEL Communications A/S
 Tel: +46 31 744 7700
 Fax: +46 31 744 7701
 Email: sales@zyxel.se
 http://www.zyxel.se

Finland
 ZyXEL Communications Oy
 Tel: +358-9-4780 8400
 Fax: +358-9-4780 8448
 Email: sales@zyxel.fi
 http://www.zyxel.fi